

Where we are today. Where we go next.

PIM+ Roadmap & Beyond

Don Leclair / Stefan Konijnenberg

The next evolution of PIM+

API-driven monitoring

Richer information about your environment

PIM+ Extension Gallery

Monitoring capabilities you can reuse

Dashboard as Code

Dashboards you can adapt and share


Dynamic Tabs

The right information for each device

API-driven monitoring

More context through the connections
your devices already offer.

SNMP was king. Now we're going API-first

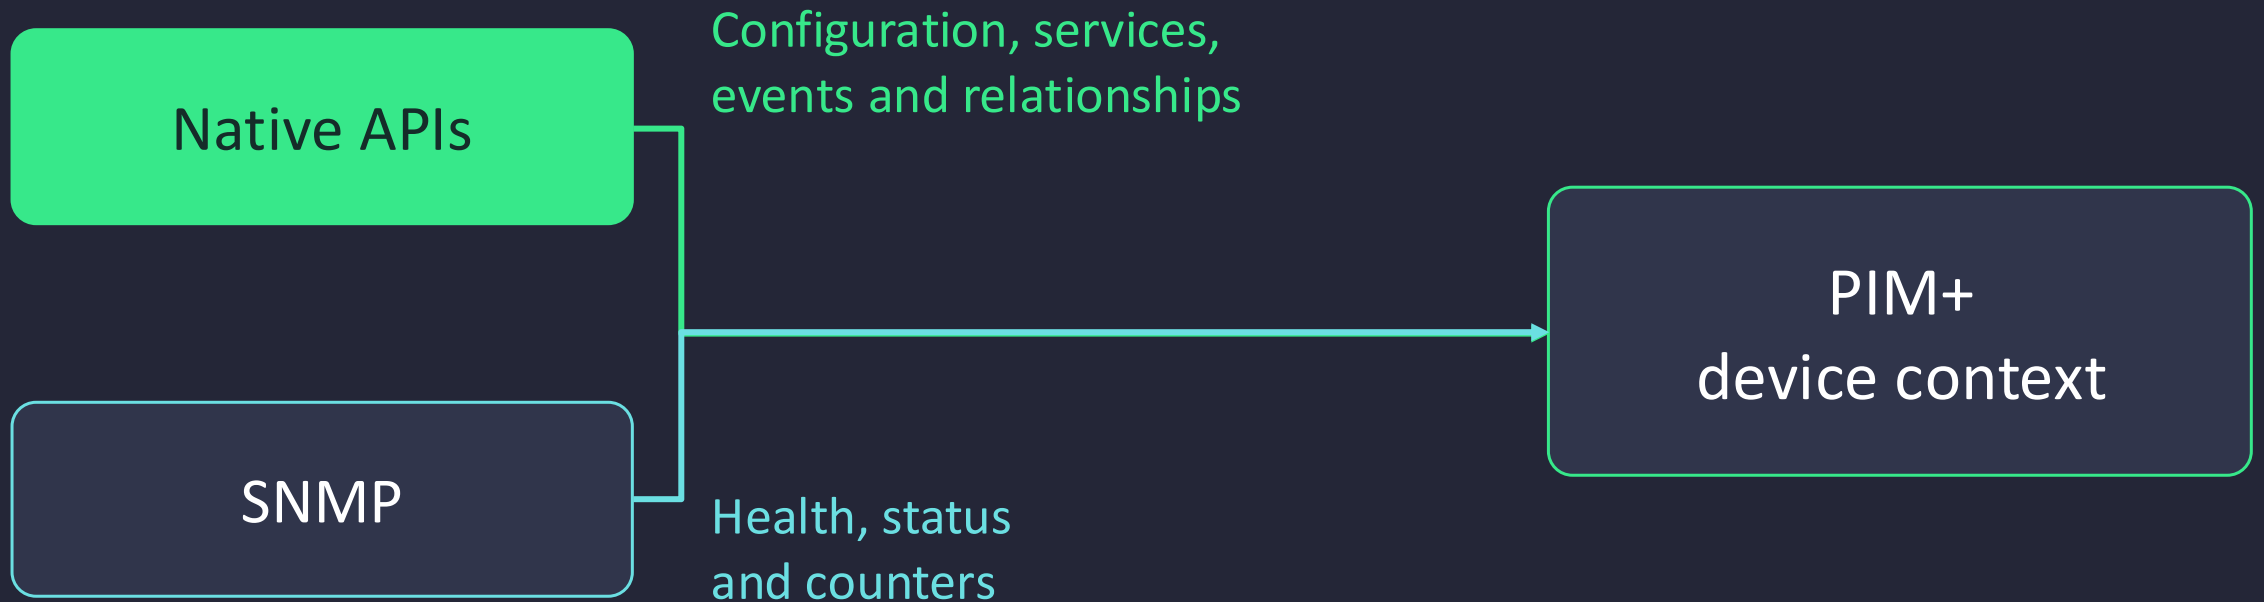


APIs lead our next chapter. SNMP remains useful for coverage.

Example: a firewall alert with context

What happened?

Where?

What could it affect?

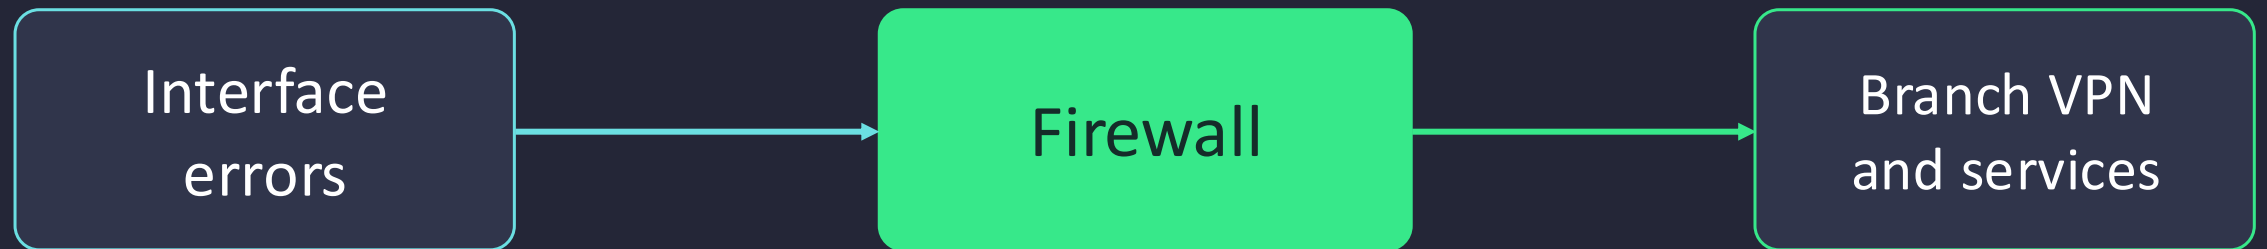


“Which branch or service should I investigate first?”


PIM+ Extension Gallery

A library of monitoring capabilities
you can add to PIM+.

What the Extension Gallery delivers

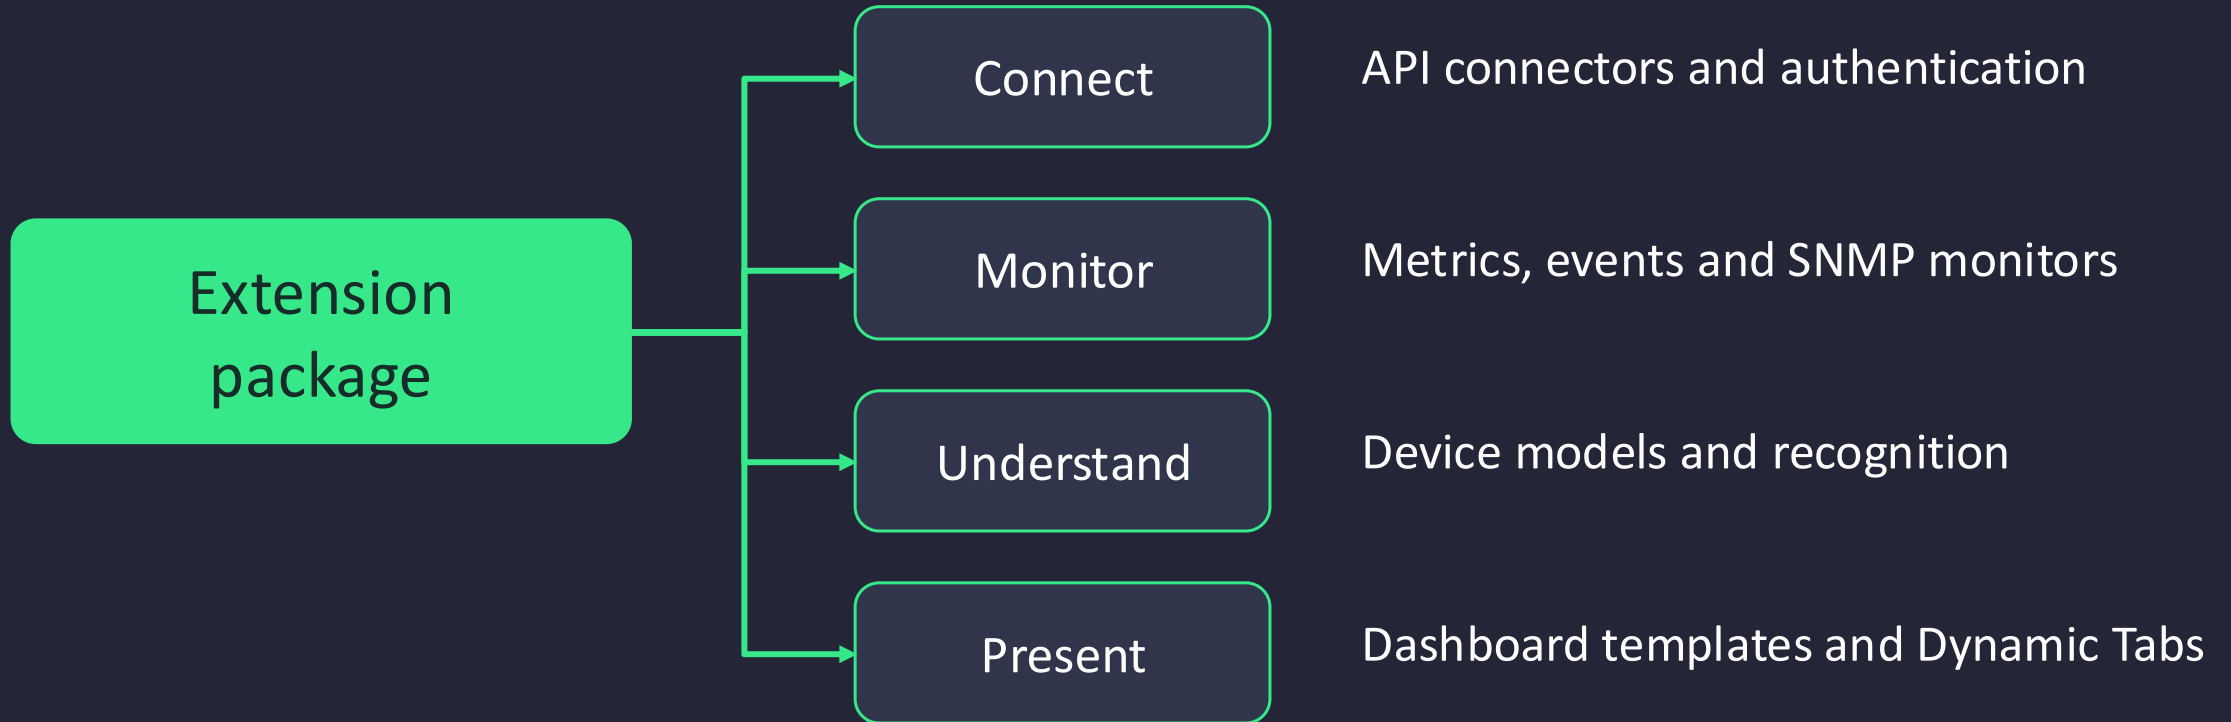

Online and offline Extension Gallery

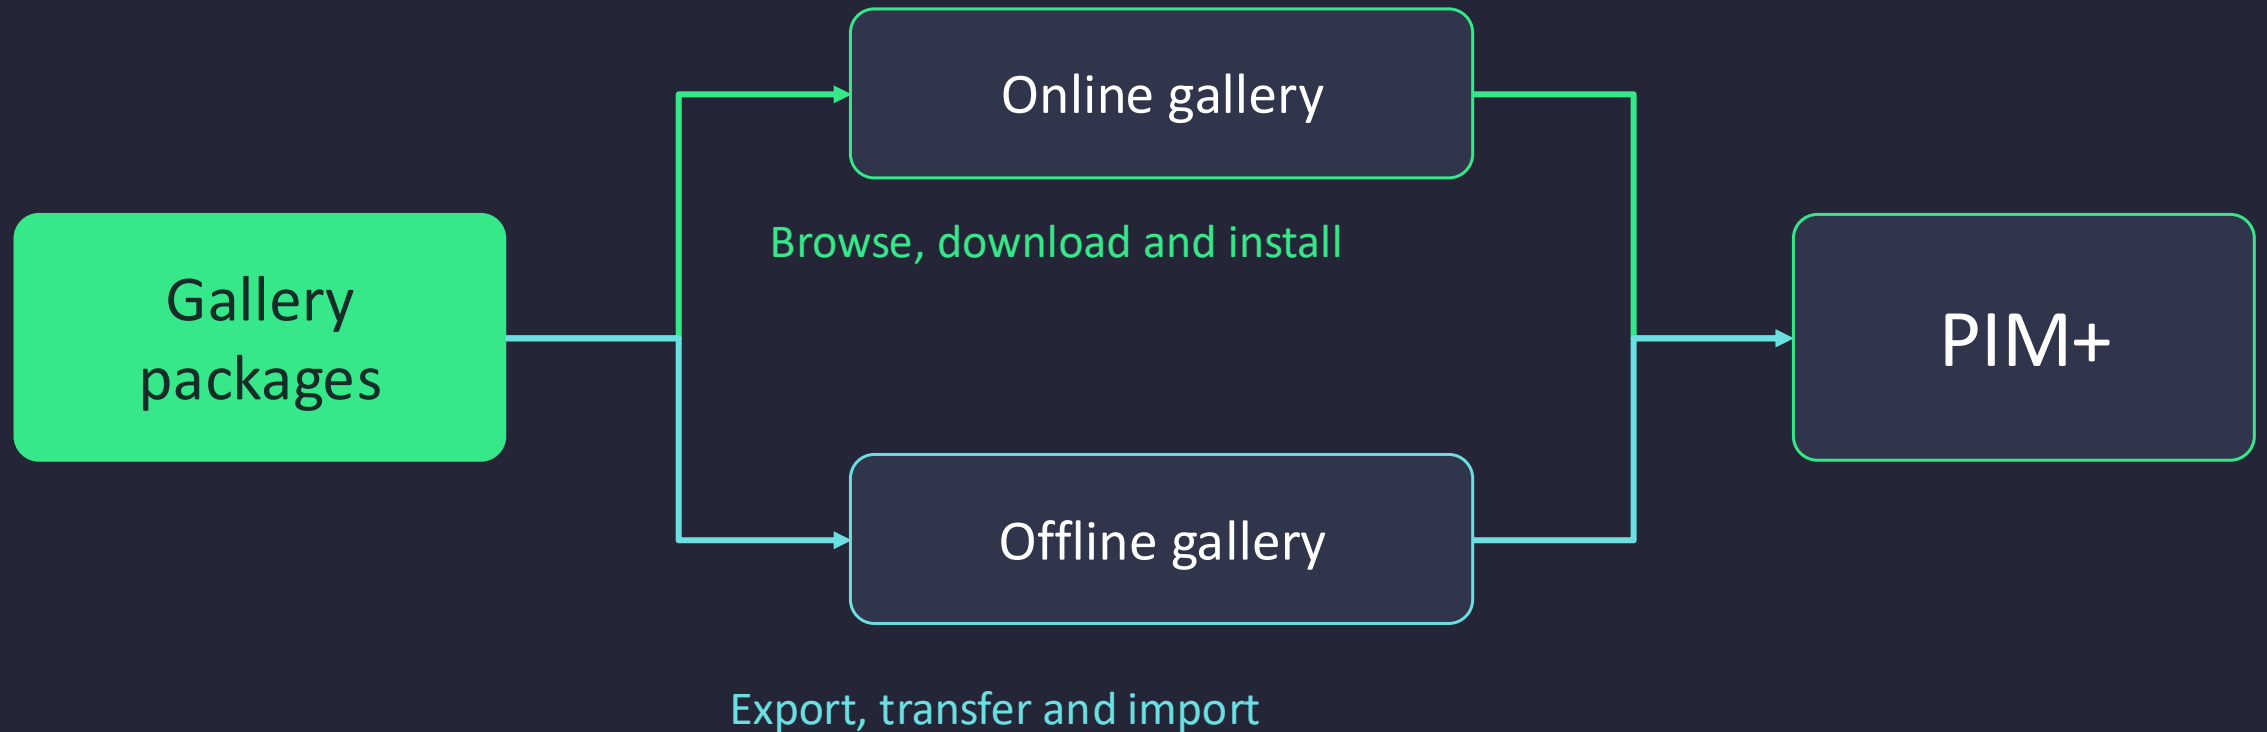

Extension Gallery

Add Event Monitor

Search event monitors...

9 monitors

Sync

Category

Vendor

Eaton

1

Fortinet

1

HPE

5

Microsoft

54

Palo Alto

1

PIM+

69

Proxmox

5

PureStorage

4

Rittal

3

Schneider Electric

9

Synology

1

TOPdesk

1

Ubiquiti

4

Veeam

2

VMware

6

SCHNEIDER ELECTRIC 9

Schneider Electric ATS

Schneider Electric · v1.0

New

SNMP monitoring for Schneider Electric/APC Automatic Transfer Switches: selected source, redundancy, input/output phases, and load state.

SNMP

Schneider Electric Environmental

Schneider Electric · v1.4

New

SNMP monitoring for Schneider Electric/APC environmental probes: temperature, humidity, connection status, and threshold violations.

SNMP

Schneider Electric InRow Cooling

Schneider Electric · v1.0

New

SNMP monitoring for Schneider Electric/APC InRow cooling units: supply/return air temperature, compressor state, and leak detection.

SNMP

Schneider Electric PDM

Schneider Electric · v2.0

New

SNMP monitoring for Schneider Electric/APC Power Distribution Modules: output frequency, phase-to-neutral voltage, and dynamically discovered phase currents.

SNMP

Schneider Electric Rack PDU

Schneider Electric · v1.0

New

SNMP monitoring for Schneider Electric/APC Rack PDUs (rPDU2): per-phase and device power, voltage, current, load state, and hardware identity.

SNMP

Schneider Electric Row PDU

Schneider Electric · v1.0

New

SNMP monitoring for Schneider Electric/APC Row PDUs (xPDU MIB): system power, per-phase voltage/current/power, and branch breaker load.

SNMP

OK

Cancel


Dashboard as Code

A reusable description of a dashboard,
ready to adapt and share.

Example AI prompt: a VMware cluster dashboard

“Create a VMware cluster dashboard.

Show cluster health, host CPU and memory, VM status, storage latency and critical alerts.”

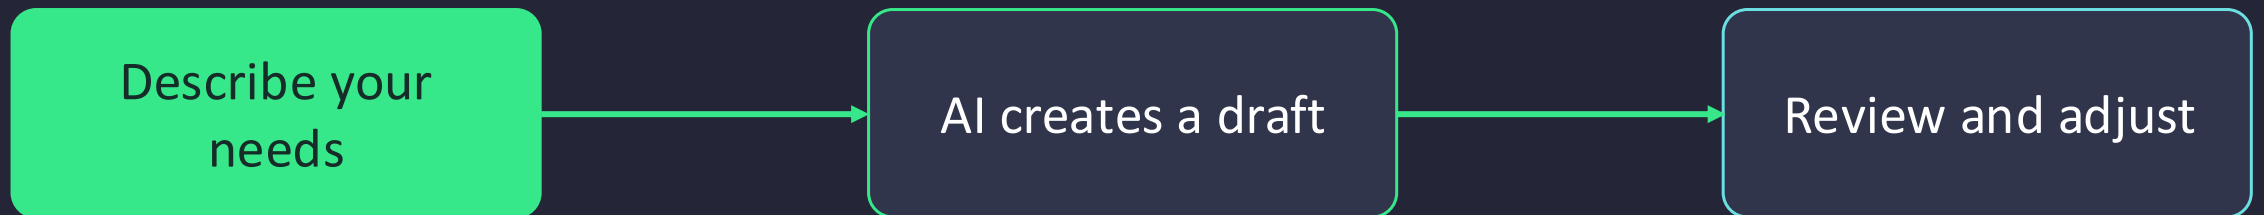

Dashboard as Code



 | Certificate dashboard

✓ Saved

</> Export as code

0
Critical

0
Error

2
Warning

6
Info

 10:49

SITE	CERTIFICAAT	RESTEREND
demo.pim.plus	OK 4 cert(s) Tls13 demo.pim.plus — YR2	40 dagen tot 25-10-2026
pim.plus	OK 4 cert(s) Tls13 *.pim.plus — Amazon RSA 2048 M01	47 dagen tot 01-11-2026
kb.pim.plus	OK 4 cert(s) Tls13 *.pim.plus — Amazon RSA 2048 M04	47 dagen tot 01-11-2026
admin.pim.plus	OK 4 cert(s) Tls13 *.pim.plus — Amazon RSA 2048 M01	47 dagen tot 01-11-2026
demo.sentius.nl	OK 4 cert(s) Tls13 demo.sentius.nl — YR2	47 dagen tot 01-11-2026
monitoring.sentius.nl	OK 4 cert(s) Tls13 monitoring.sentius.nl — YR1	49 dagen tot 03-11-2026
portal.pim.plus	OK 5 cert(s) Tls13 portal.pim.plus — YE1	81 dagen tot 04-12-2026

Export dashboard as code

×

Save your layout, widgets and settings in one file.

JSON

YAML

dashboard.json

JSON ▾

```
1 {
2   "name": "Certificate dashboard",
3   "version": 1,
4   "theme": "dark",
5   "refreshInterval": 60,
6   "widgets": [
7     {
8       "id": "status-summary",
9       "type": "status-summary",
10      "title": "Certificate status",
11      "layout": { "x": 0, "y": 0, "w": 12, "h": 1 },
12      "config": {
13        "critical": 0,
14        "error": 0,
15        "warning": 2,
16        "info": 6
17      }
18    },
19    {
20      "id": "certificate-table",
21      "type": "table",
22      "title": "Certificates",
23      "layout": { "x": 0, "y": 1, "w": 12, "h": 8 },
24      "config": {
25        "columns": ["site", "certificate", "expiresIn"],
26        "pageSize": 10,
27        "sortBy": "expiresIn",
28        "sortOrder": "asc"
29      }
30    }
31  ]
32 }
```

Includes widget configuration and layout


Copy code

Download JSON

Dynamic Tabs

Device pages that adapt
to the device you are looking at.

Examples: the right view for each device

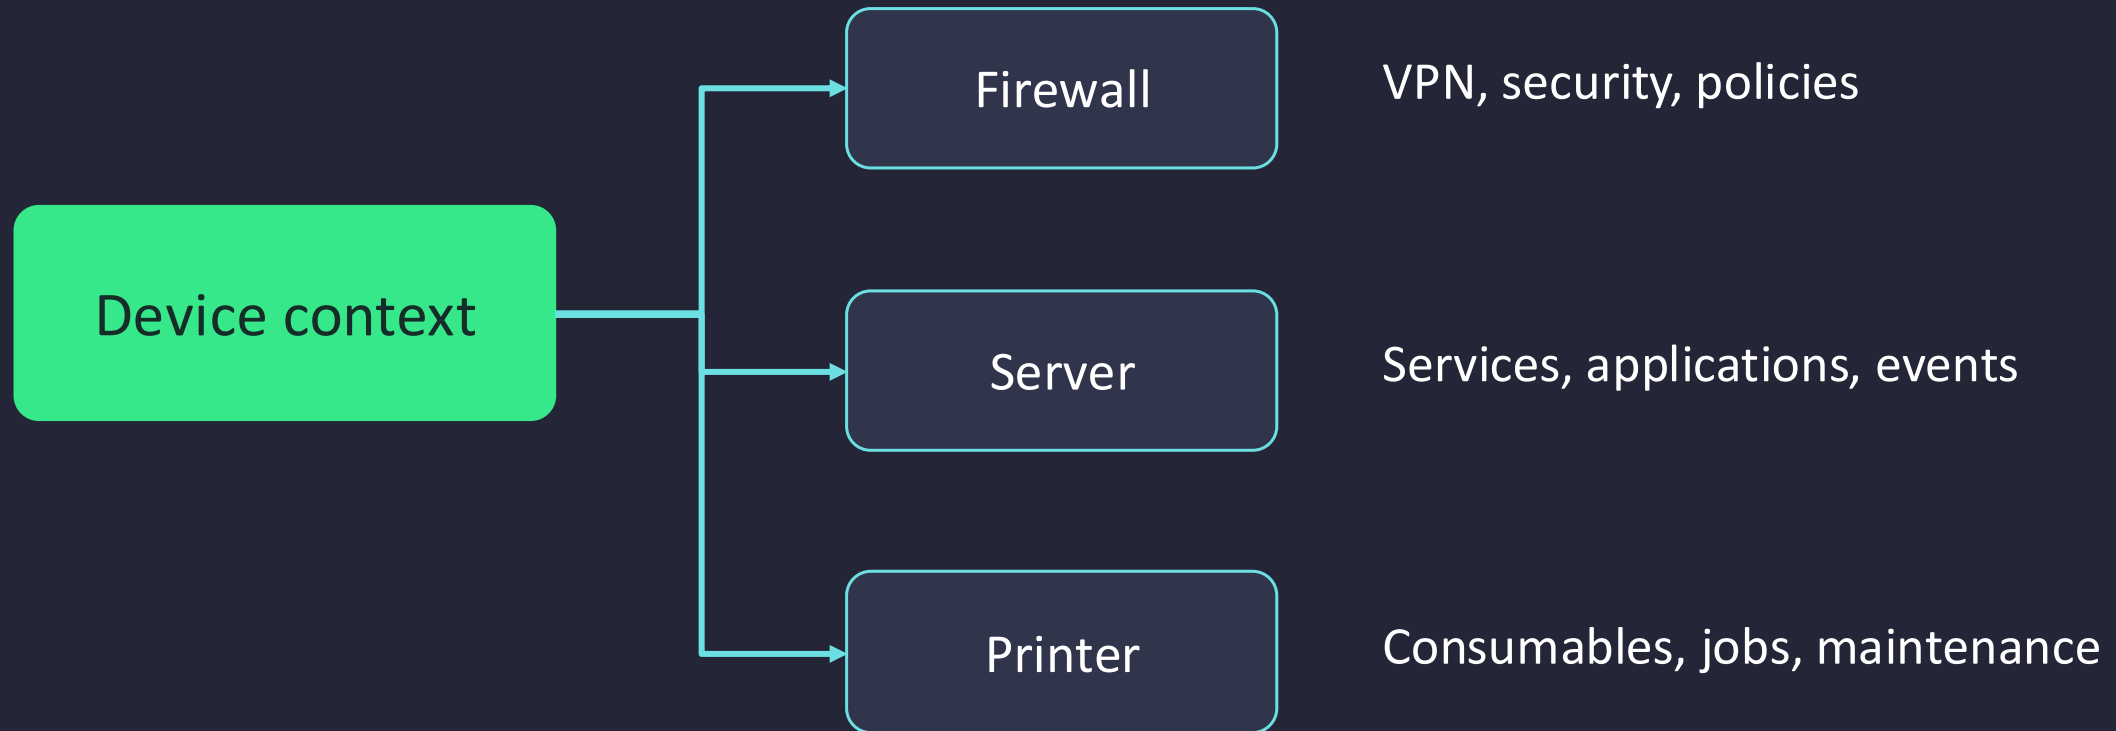

The page reflects what the device can tell you.

Dynamic Tabs · Event Monitor status



Event Monitors / Management / Dell iDRAC - Event Monitor

Monitoring 1 device - Runs every 10 minutes

Actions

Status

iDRAC status


History

Graphs

Tickets

Settings

STATUS

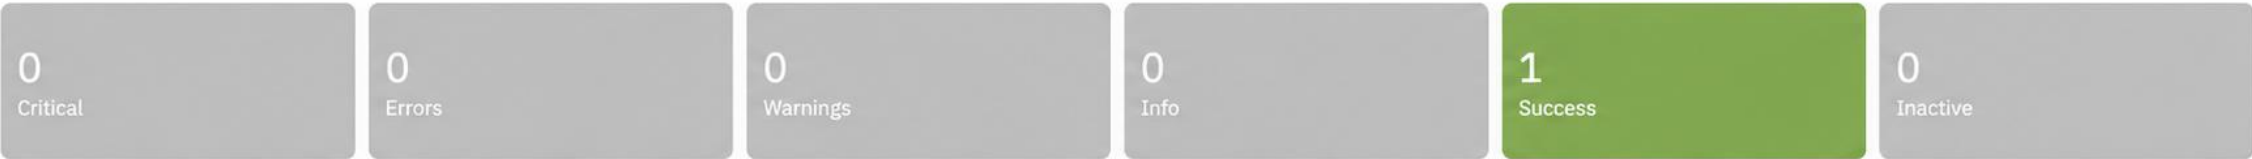

STATUS GRAPHS

No status graphs selected

Add Status Graph

DEVICES

Status	Network Device	Message	Last Run Time	Actions
+ Success	idrac.sentius.nl	Successful Events: Dell iDRAC Health - Health=OK, PSU=0 critical/0 warning, Fan...	3 minutes ago	▼

Showing 1 to 1 of 1 entries

Dynamic Tabs · Dell iDRAC status



Event Monitors / Management / Dell iDRAC - Event Monitor

Monitoring 1 device - Runs every 10 minutes

Actions

Status

iDRAC status

History

Graphs

Tickets

Settings

iDRAC STATUS

Device: idrac.sentius.nl

Success

Last Run Time: 3 minutes ago

SYSTEM HEALTH

OK

POWER STATE

On

POWER CONSUMED

82 W

MAX TEMPERATURE

63 C

SERVER DETAILS

Property	Value
Server model	PowerEdge R340
Host name	X-ICT-MGT
Serial	CNWS30006501EE
BIOS	2.19.0
iDRAC firmware	7.00.00.181
PSU redundancy	OK
Power metrics	Min: 61 W / Avg: 82 W / Max: 110 W

TEMPERATURE SENSORS

Sensor	Reading	Warn	Crit	Status
CPU1 Temp	63 C	-	100 C	OK
System Board Exhaust Temp	47 C	75 C	80 C	OK
System Board Inlet Temp	29 C	43 C	47 C	OK

COMPONENTS

Component	OK	Warning	Critical/Down	Total
Power supplies	2	0	0	2
Fans	8	0	0	8
Drives	2	0	0	2
NICs	2	0	0	2

POWER SUPPLIES

Status	Model	Capacity	Output	Input V	Health
PS1 Status	PWR SPLY,350W,RDNT,LTON	350 W	61 W	232 V	OK
PS2 Status	PWR SPLY,350W,RDNT,LTON	350 W	0 W	232 V	OK

STORAGE CONTROLLERS


Controller	Model	Firmware	Cache	Cache health	Health
PERC H330 Adapter	PERC H330 Adapter	25.5.9.0001	0 MB	N/A	OK
Cannon Lake PCH SATA AHCI Controller	Cannon Lake PCH SATA AHCI Controller	-	0 MB	N/A	OK

Telemetry AI


We're working on an AI-driven analytics add-on for PIM.

In development. Availability to be determined.


Telemetry beyond synthetic checks

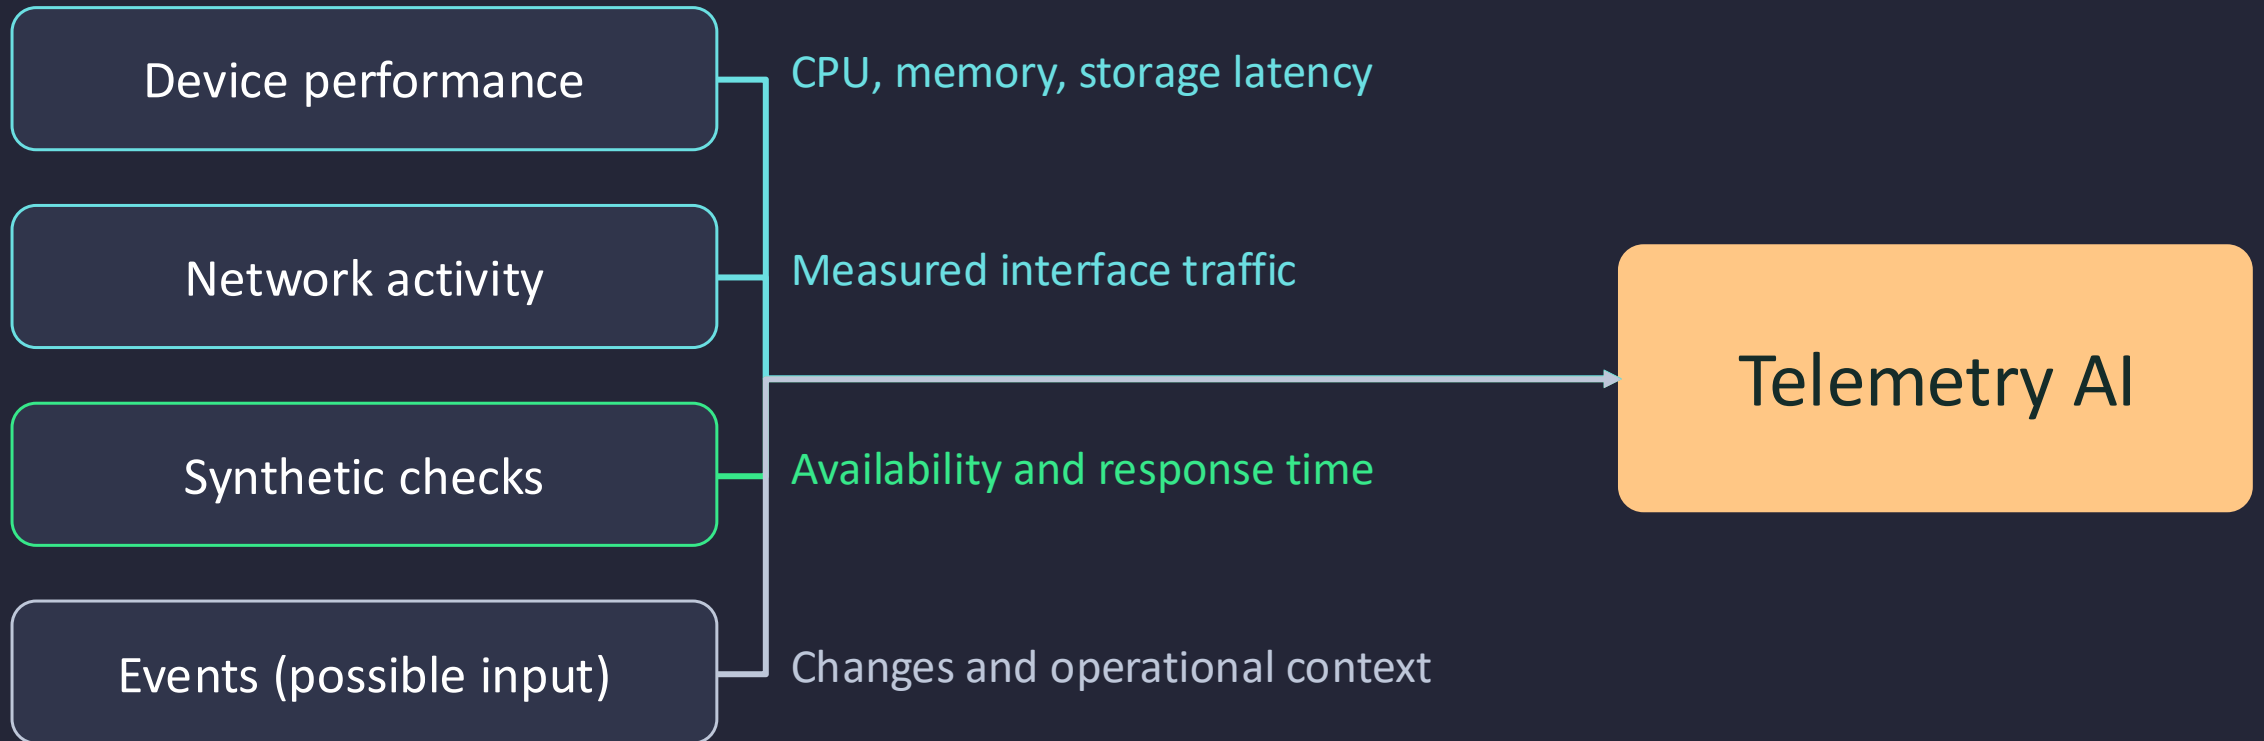

A reviewed response to unusual behaviour

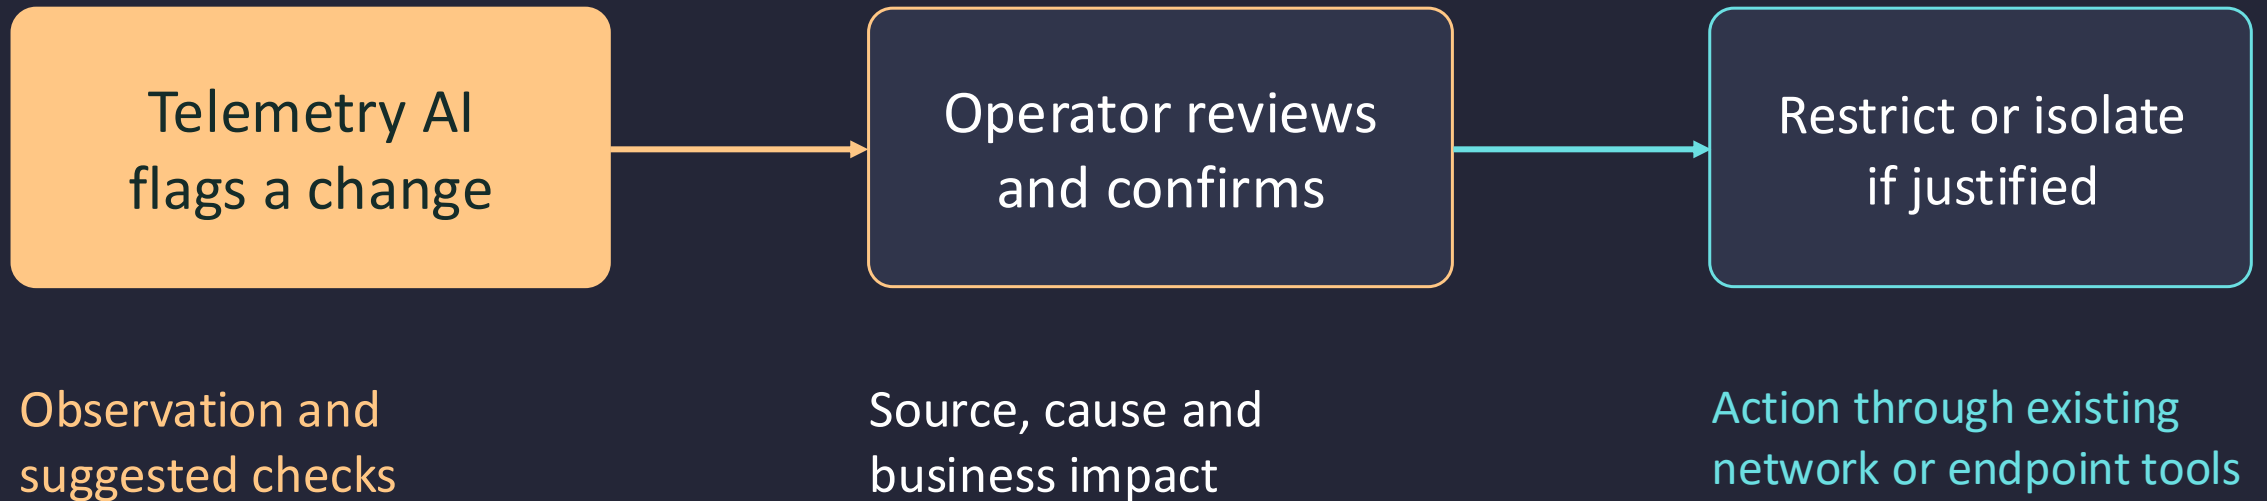


Network example: unusual outbound traffic

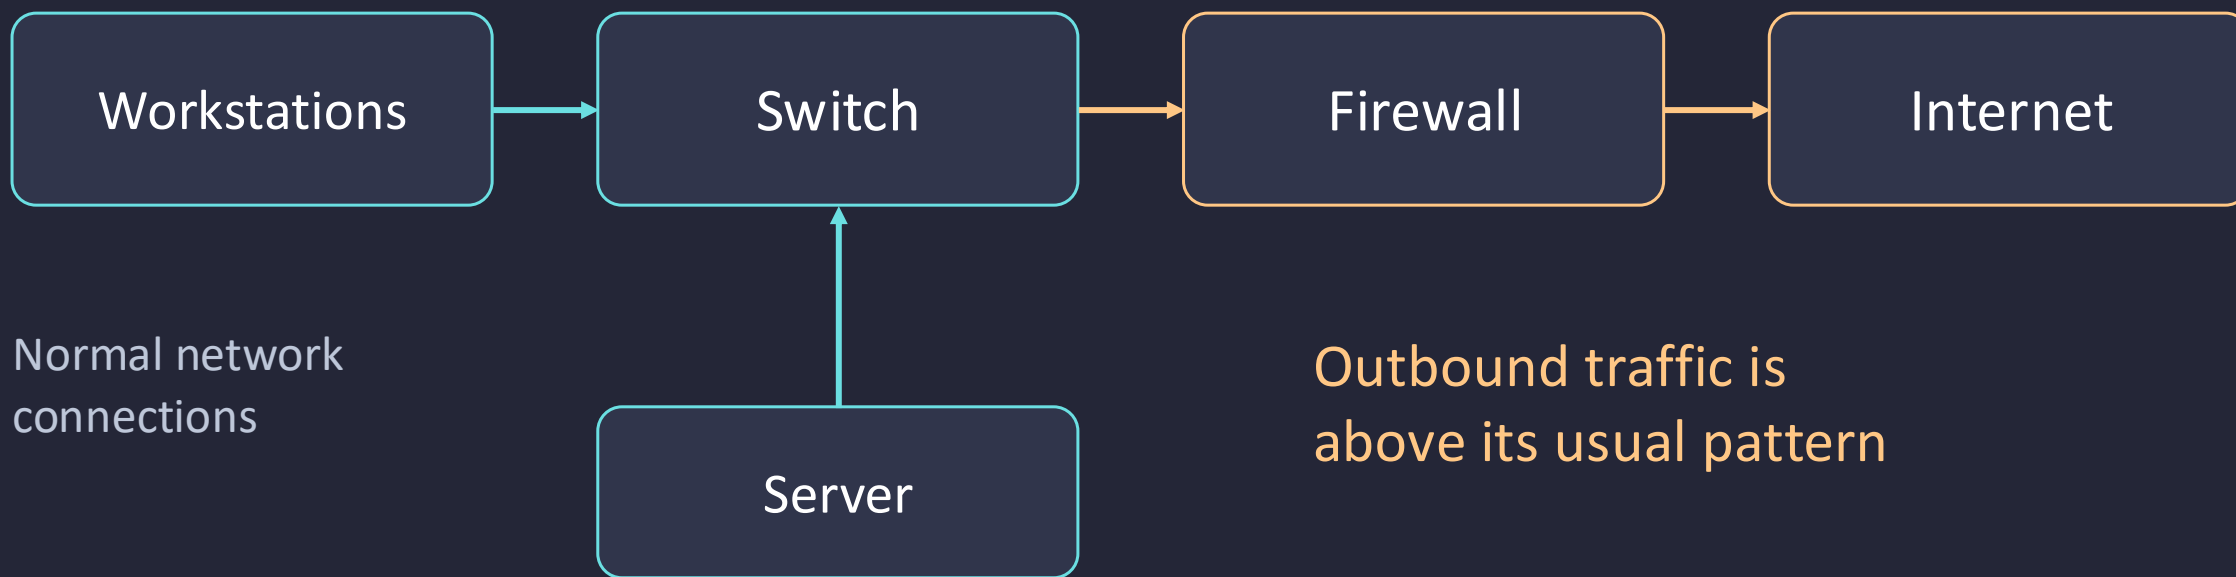


Telemetry AI flags the change and suggests where to investigate.

Telemetry AI runs at your site (100% LOCAL)

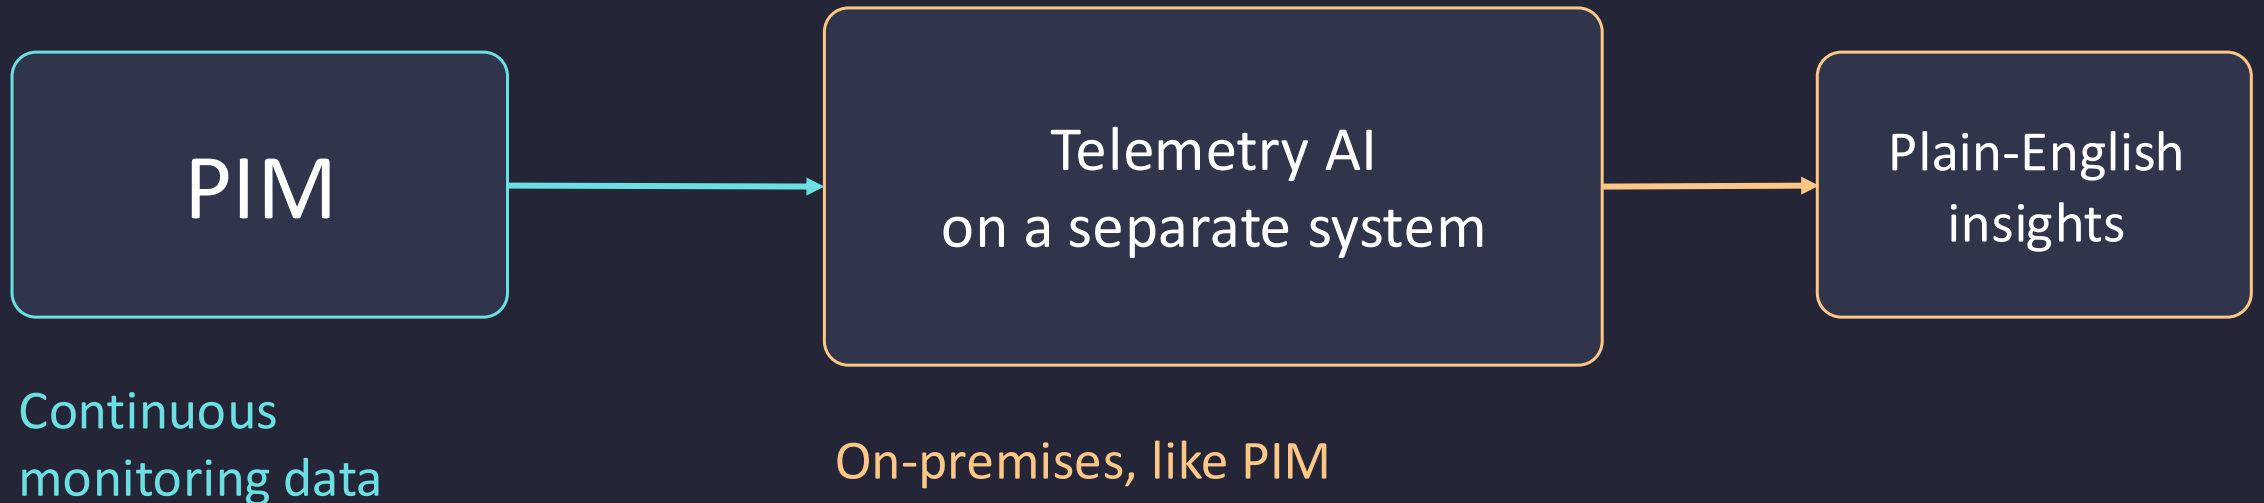

Separately priced add-on. License model to be determined.

Insights wherever you use PIM

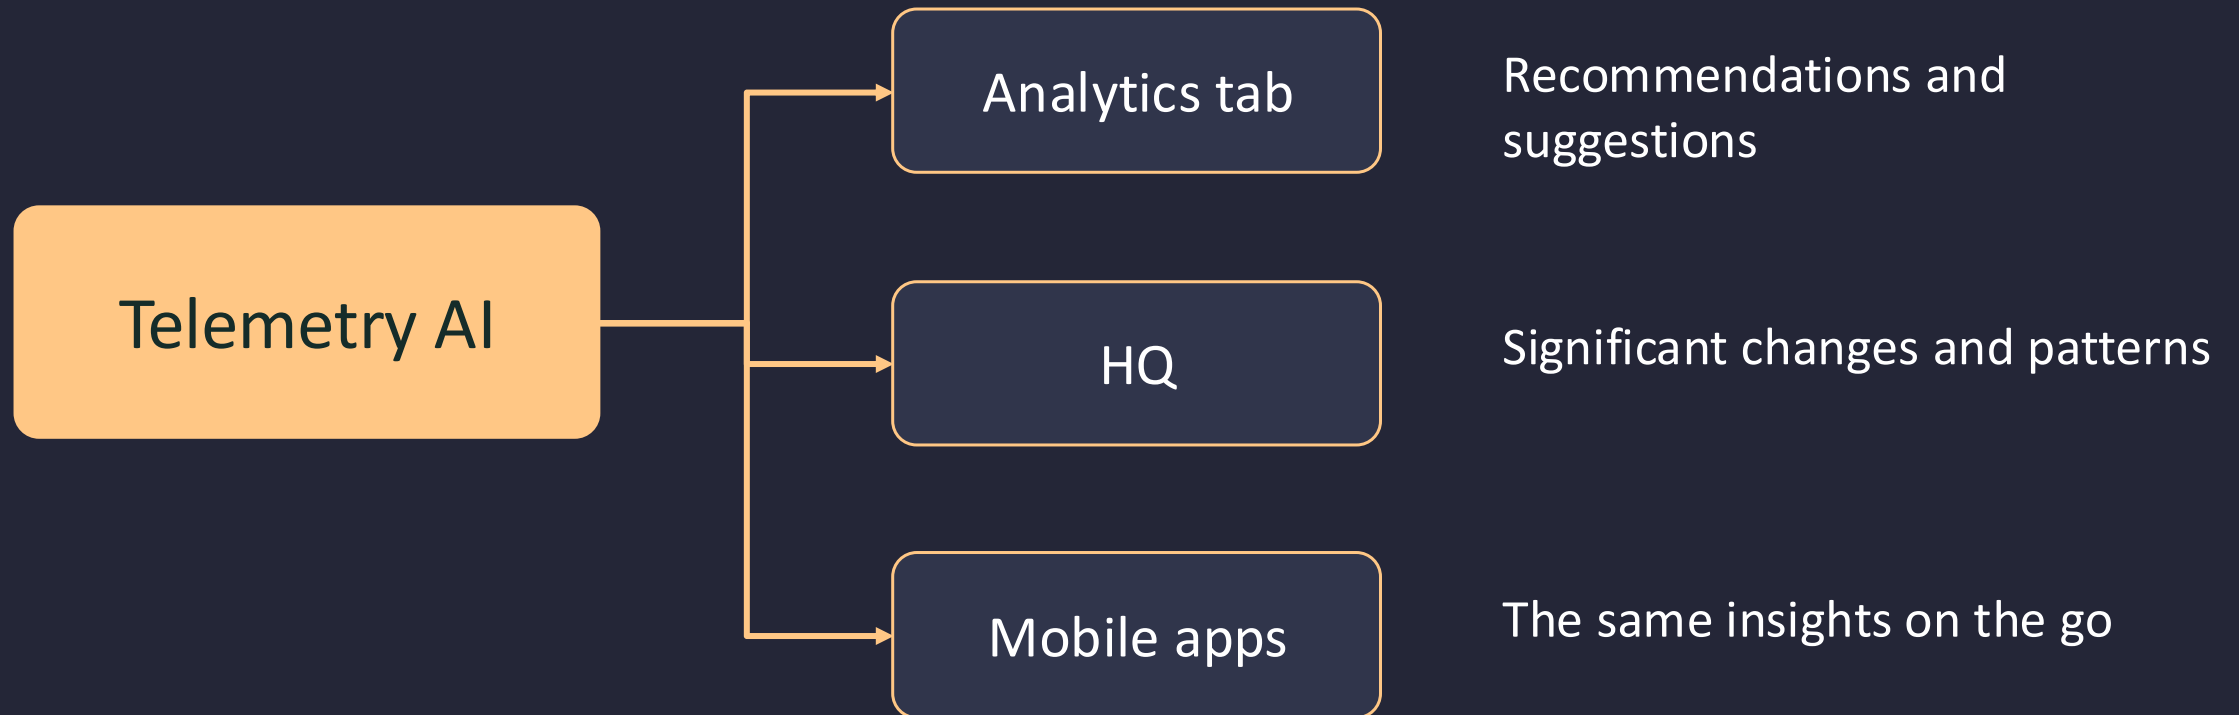

Where should the journey take you?

Which integration
would you install first?

Which dashboard would
you ask AI to create?

Which question takes too long
to answer today?